



# ALPHA<sup>®</sup> 7000-NEMA 4 & 4X

## To Keep You Up & Running


The NEMA 7000 series - designed for preventive safety, quality control maintenance and the continuous real time employee communication you need, to keep production up and running.

Don't risk production coming to a screeching halt. Our 7000 Series 4 & 4X provides maximum protection against windblown dust and splashing, hose-directed water through any of your industrial processes.

ALPHA™ displays can be addressed individually or collectively and offer a wide variety of flexible connectivity options:

STANDARD: *Simple point to point RS232 communications*  
*Multi-drop RS485 connections*

OPTIONAL: *Communications via standard on-site paging systems*  
*RF Modem solutions*  
*Ethernet LAN connections*

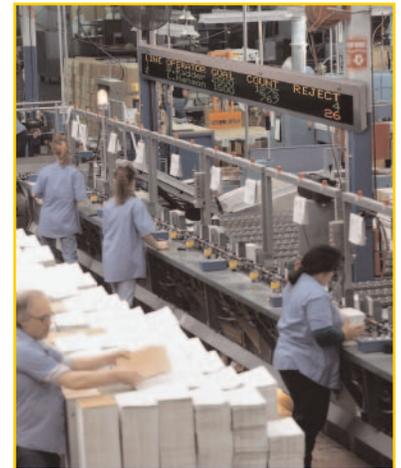

## Standard Features

- NEMA 4 – steel casing withstands dust, drip, splashing and hose-directed water
- NEMA 4X – stainless steel casing protects against corrosion, dust, drip, splashing & hose directed water
- Easy Networking
- Character size: 1.5" – 7.2"
- Length options available
- One year USA Factory Warranty
- Stores & displays over 80 messages
- Flexibility of 1-4 line message
- Keyboard programmable from 30 ft.

# ALPHA® 7000-NEMA 4 & 4X

Sizes	7120	7160	7200
<b>*Case Dimensions:</b> (Power supply inside case)	42.24"L x 5.93"D x 13.70"H (107.29 cmL x 15.06 cmD x 34.8 cmH)	54.24"L x 5.93"D x 13.70"H (137.77 cmL x 15.06 cmD x 34.8 cmH)	66.24"L x 5.93"D x 13.70"H (168.25 cmL x 15.06 cmD x 34.8 cmH)
<b>Approximate Weight:</b>	60 lbs. (27.2 kg.)	70 lbs. (31.8 kg.)	80 lbs. (36.3 kg.)
<b>Display Dimensions:</b>	36"L x 7.2"H (91.5 cmL x 18.3 cmH)	48"L x 7.2"H (121.9 cmL x 18.3 cmH)	60"L x 7.2"H (152.4 cmL x 18.3 cmH)
<b>Display Array</b>	120 x 24 pixels	160 x 24 pixels	200 x 24 pixels
<b>Characters Displayed in:</b>	minimum/typical/maximum	minimum/typical/maximum	minimum/typical/maximum
<b>One-Line:</b>	10/12/15	14/16/20	18/20/25
<b>Two-Line:</b>	40/40/60	52/52/80	66/66/100
<b>Three-Line:</b>	60/60/90	78/78/120	99/99/150
<b>Four-Line:</b>	96/96/120	128/128/160	160/160/200
<b>Text Memory</b>	50,000 Characters typical	50,000 Characters typical	50,000 Characters typical
<b>Graphic Memory:</b>	40,000 = 50 Full screen graphics	40,000 = 40 Full screen graphics	40,000 = 30 Full screen graphics

<b>Pixel Size (Diameter):</b>	0.2" (.05 cm)
<b>Pixel (LED) Color:</b>	Each dot can be red, green, or amber
<b>Center-to-Center Pixel Spacing (Pitch):</b>	0.3" (0.8 cm)
<b>Character Size</b>	
<b>(One-line format):</b>	7.2" (18.3 cm)
<b>(Two-line format):</b>	3.0" (7.6 cm)
<b>(Three-line format):</b>	2.1" (5.3 cm)
<b>(Four-line format):</b>	1.5" (3.9 cm)
<b>Character Set:</b>	International Character Set, Block (sans serif), decorative (serif), upper/lower case, slim, wide, double wide
<b>Memory Retention:</b>	One month typical
<b>Message Capacity:</b>	81 different messages can be stored and displayed
<b>Message Operating Modes:</b>	<ul style="list-style-type: none"> <li>– 19 consisting of: Automode™, Hold, Roll (6 directions), Rotate, Sparkle-On, Twinkle, Interlock, Wipe (six directions) Flash and Scroll</li> <li>– Continuous message entry with automatic centering in any mode</li> <li>– User programmable logos and graphics</li> <li>– Five variable speed controls</li> </ul>
<b>Real-Time Clock:</b>	Date and time, 12 or 24 hour format, maintains accurate time without power for up to 30 days typical

<b>Serial Computer Interface:</b>	RS232 and RS485 (multi-drop networking for up to 255 displays) <i>Options</i> – Wireless Interface – Ethernet LAN interface
<b>Power:</b>	120 VAC ± 10% - 180 watts max for all models. (230 VAC models also available)
<b>Keyboard:</b>	Handheld, Eurostyle, IR remote
<b>Case Material:</b>	NEMA 4—Steel NEMA 4X—Stainless steel
<b>Limited Warranty:</b>	One-year parts and labor, factory servicing
<b>Agency Approvals:</b>	120 VAC Model: Listed to ANSI/UL 1950-Second Edition (US) and CAN/CSA-22.2 No.950-M89 (Canada) 230 VAC Models: Complies with EN 60950:1992 (Europe) and AS/NZS 3260-1993 (Australia) – FCC Part 15 Class A – CE Marked
<b>Operating Temperature:</b>	32° to 120°F, 0° to 49°C
<b>Temperature Control</b>	Self regulated overheating protection
<b>Mounting:</b>	Hardware to accommodate ceiling or wall mounting
<b>Enclosure Options:</b>	<ul style="list-style-type: none"> <li>– Designed to NEMA 4 specifications</li> <li>– Designed to NEMA 4X specifications</li> <li>– Meets NEMA 12 specifications</li> </ul>